


REV	DESCRIPTION	DATE	APPROVED

Detailed Product Description:
 Waterproof connector rating is IP67/IP68
 Protected from dust and water during immersion,
 resistant to many oils and chemical etc

Other Specification
 Contact PIN: Brass with Gold plating.
 Coupling nut/screw: Brass with nickel plating
 Insulation plastic: PA66+GF
 Degree of protection: IP67/IP68
 Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

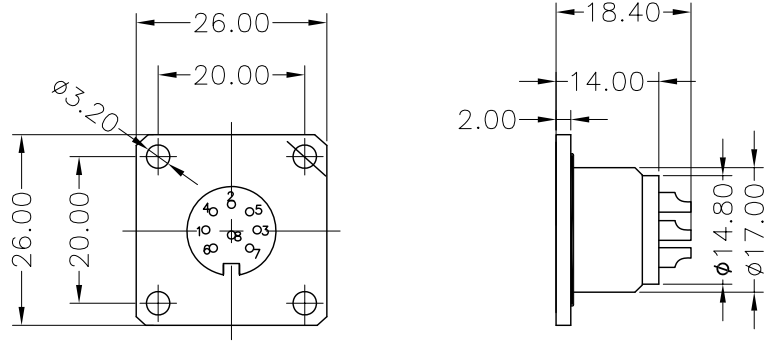

Contacts	Rated voltage		Rated current	Contact Resistance
	A/C	D/C		
	250V	250V	7A	5mΩ
	250V	250V	7A	5mΩ
 DIN41524	250V 60V	250V 60V	6A	5mΩ
 DIN45322	250V	250V	5A	5mΩ
 DIN45326	60V	60V	5A	5mΩ
	60V	60V	3A	3mΩ

SIGNAL [®] Shen Zhen Signal Electronics co.,Ltd		TITLE	
		SGN NO	REV.
DRAWN BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE:	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		DECIMALES	ANGLES
		THIRD ANGLE PROJECTION	SIZE: A4 UNITS: mm
.x ±0.5	x.' ±2.0'	SCALE:	SHEET: 1 OF 1
.xx ±0.20	.x' ±1.0'		