




REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2014/08/17	KAIHUI



Detailed Product Description:  
Protected from dust and water during immersion,  
resistant to many oils and chemical etc

Electrical character  
Rating voltage: 30V AC/DC ,  
Insulation resistance: >100MΩ  
Rating current : 3A  
Contact resistance: ≤10mΩ

Other Specification  
Contact Pin: Phosphor Copper with Gold plating.  
Coupling nut/screw: Brass with nickel plating  
Insulation plastic: PA66+GF  
O-Ring: Green Viton  
Degree of protection: IP67/IP68  
Operating temperature: -25°C ~ +85°C

\*ALL MATERIALS ARE RoHS COMPLIANT.

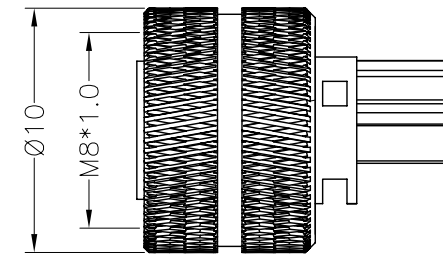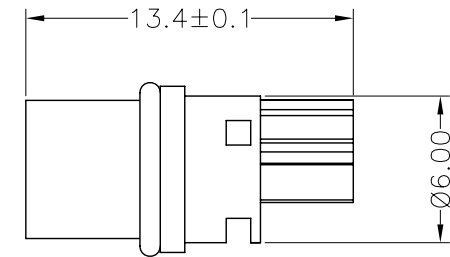

 <b>SIGNAL</b> <sup>®</sup> Shenzhen Signal Electronics Co., LTD		TITLE M8 A CODING 4P/F CONNECTOR	
		SGN NO M08AF04001	REV. SO
DRAWN BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE:	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.</small>		DECIMALES .x ±0.5 .xx ±0.20	ANGLES x.' ±2.0' .x' ±1.0'
		THIRD ANGLE PROJECTION  SIZE: A4 UNITS: mm SCALE: SHEET: 1 OF 1	