


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2020/06/30	XFY
S1	Add 2.5M	2024/08/26	TANG

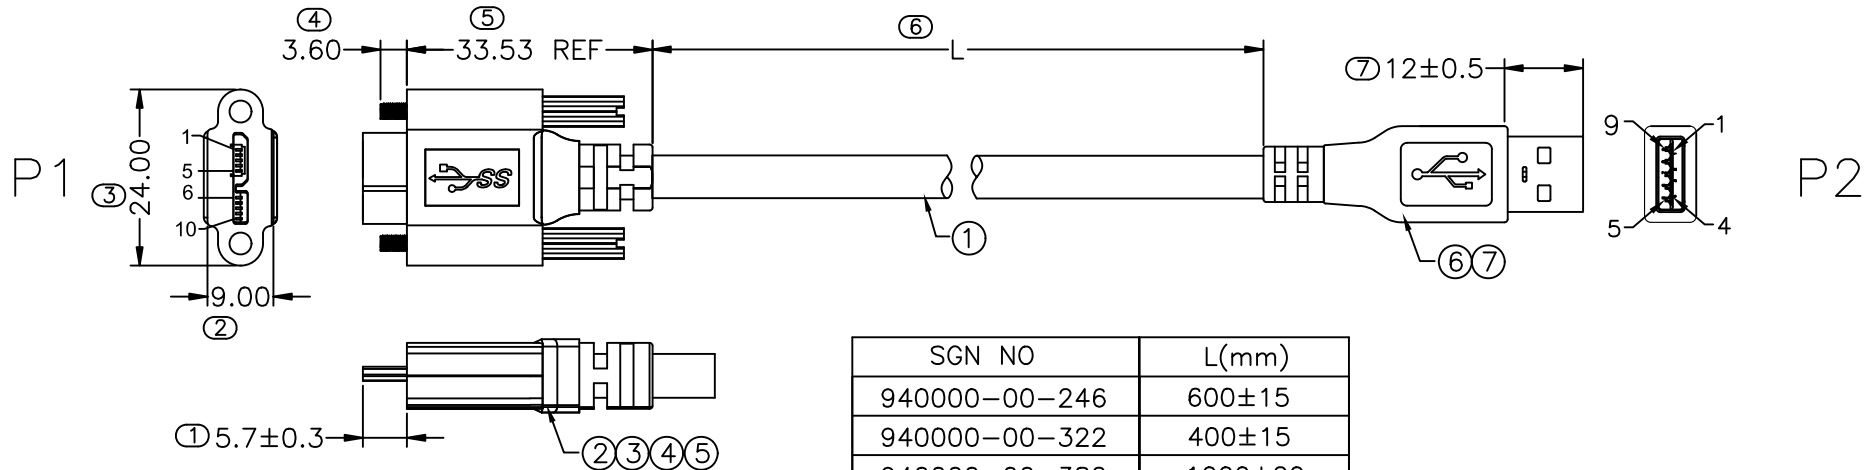

SGN NO	L(mm)
940000-00-246	600±15
940000-00-322	400±15
940000-00-382	1000±20
940000-00-383	1500±20
940000-00-510	2500±30

TESTING CONDITIONS:

1. VOLTAGE:300V DC/0.1S.
2. INSULATION RESISTANCE: 10 Mohms min.
3. CONDUCTIVE RESISTANCE: 5 Ohms max.
4. 100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

WIRE LIST

P1	PAIR	COLOR	P2
1	—	RED	1
2	XX	WHITE	2
3	XX	GREEN	3
5	—	BLACK	4
6	XX	BLUE	5
7	XX	YELLOW	6
8	—	DRAIN	7
9	XX	PURPLE	8
10	XX	ORANGE	9
SHELL	—	BRAID+DRAIN	SHELL

⑦	PL00008	BLACK 30P PVC	6	g
⑥	CN00853	USB 3.0 A TYPE MALE CONNECTOR	1	SET
⑤	PL00007	LD-PE	2	g
④	PL00011	BLACK PVC 45P	6	g
③	SW00059	Brass nickel plated screw M2 *33.2mm	2	PCS
②	CN00661	USB 3.0 MICRO B/M Nickel-plated black core	1	SET
①	CA01121	UL20276(USB3.0) (1P#28+DAM)*2+2C#20+1P#28+AB JACKET BLACK PVC OD:6.0MM	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

SIGNAL® Shenzhen Signal Electronics Co., LTD		TITLE USB 3.0 A TO USB 3.0 MIRCO B CABLE	
		SGN NO	SEE LIST
		DWG NO	
		CUSTOMER	
DRAWN BY CHECKED BY APPROVED BY		DATE DATE DATE	
TOLERANCES ARE: DECIMALES .x ±0.5 .xx ±0.20		ANGLES x.° ±2.0° .x.° ±1.0°	
THIRD ANGLE PROJECTION 		SIZE: A4	UNITS: mm
		SCALE:	SHEET: 1 OF 1