

说明:

1. 电气特性

额定电压: 交流/直流250V,

绝缘电阻: > 100MΩ

额定电流: 4A

连接器的接触电阻≤5mΩ

2. 机械特性: 插拔/周期 >100 cycle



3. 环境特性

防护等级: IP68

操作温度: -25° C ~ + 85° C

4. 所有材料都符合RoHS标准。


5. 产品单PCS自封袋包装。

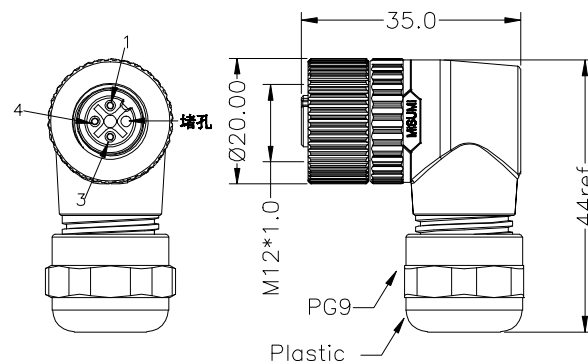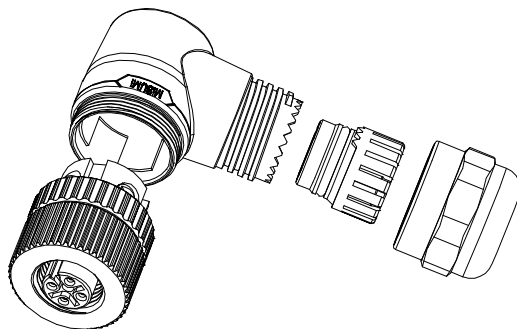

Termination:Screw

⑬	LB00002	白色铜板纸标签 L*W=50*30mm (PE袋标签)	1	PCS
⑫	CN00426-2	塑胶装配式卡环 蓝色 带客户LOGO“MISUMI”	1	PCS
⑪	OR00012	M12 母头绿色氟胶材质防水胶圈 Φ7.00*1.5mm	2	PCS
⑩	OR00048	绿色氟胶防水胶圈, Φ10.0*Φ1.5mm	1	PCS
⑨	OR00046	M12尾部密封环 Φ11.8*7.5mm 绿色氟胶	1	PCS
⑧	WK00174	M12 铝氧化银母头装配式螺母Φ20*9.7mm	1	PCS
⑦	NU00034	M2.5*0.45 M12装配式螺丝	3	PCS
⑥	CN00253	M12塑胶装配式尾部六角螺母 (PA66+GF黑色)	1	PCS
⑤	CN00252	M12塑胶装配式尾部八爪 (PA66 黑色)	1	PCS
④	CN00284	M12 90度塑胶装配式主体 (PA66+GF黑色)	1	PCS
③	CN00250	M12塑胶装配式固定主体螺母 (PA66+GF黑色)	1	PCS
②	TE00223	Ø1.0母针磷青铜镀金, 偏心针 L=19.05mm	3	PCS
①	CN00247	M12 4P/F塑胶装配式胶芯 (PA66+GF黑色)	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2017/11/21	YMX

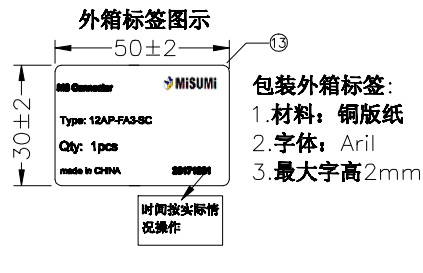


包装外箱标签:

1.材料: 铜版纸

2.字体: Arial

3.最大字高2mm



 SIGNAL®		TITLE M12 A 3P/F assembly angel connector(plastic)	
Shenzhen Signal Electronics Co., LTD		SGN NO 120103-02-024M	REV.
DRAWN BY		DWG NO SGN01041-652	A0
CHECKED BY		CUSTOMER 12AP-FA3-SC	
APPROVED BY		TOLERANCES ARE:	THIRD ANGLE PROJECTION
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES .x ±0.15 .xx ±0.10	
		ANGLES x.' ±1.0' x." ±0.5'	SIZE: A4 UNITS: mm
		SCALE:	SHEET: 1 OF 1

Web: <http://www.sz-signal.com/>

E-mail: saudi@sz-signal.com