



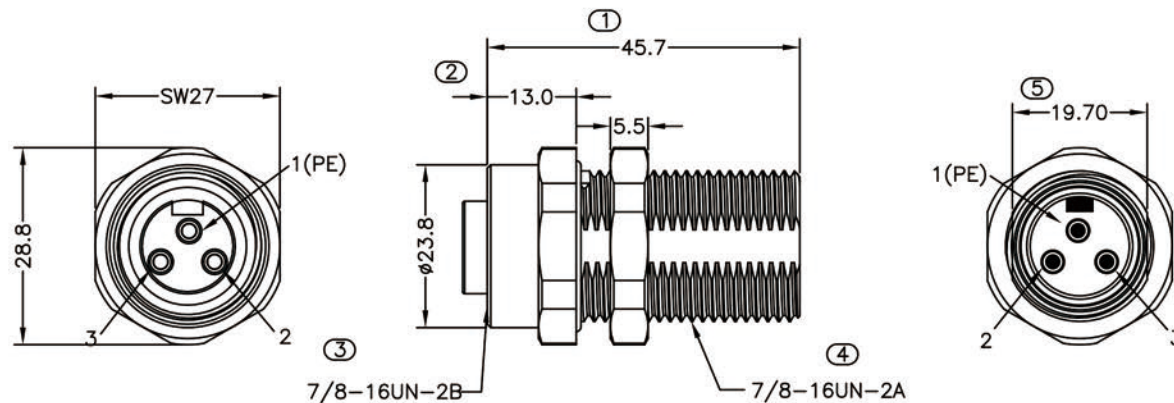

Electrical character

Rated voltage	600V
Rated current	9A
Mechanical characteristics (mating cycle)	>100
Degree of protection (ISO-20653,IEC60529)	IP67
Operating temperature (depending on cable quality)	-25°C~+85°C
Destructive withstand force between connector and overmold exceeds	2.0kgf
Tightening torque (range)	0.4~1.8Nm
Pollution degree	3
ALL MATERIALS ARE RoHS COMPLIANT	

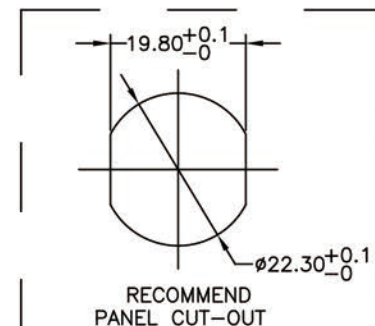

SIGNAL® Shenzhen Signal Electronics co.,Ltd		TITLE 7/8 3P M TO F CONNECTOR(METAL)	
DRAWN BY	DATE	SGN NO 780003-10-001	REV. S0
CHECKED BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	
APPROVED BY	DATE	TOLERANCES ARE: DECIMALES ANGLES .x ±0.50 x.' ±2.0° .xx ±0.20 x.' ±1.0°	THIRD ANGLE PROJECTION SIZE: A4 UNITS: mm SCALE: 1:1 SHEET: 1 OF 1
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.			