


PROJECT NO:
SGNYD1708070-3



REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2017/09/11	CRB

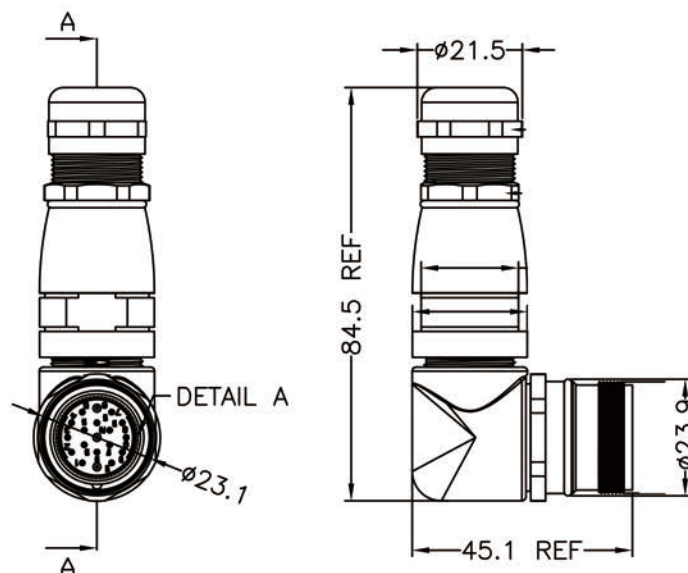

Detailed Product Description:
Waterproof connector rating is IP67/IP68
Protected from dust and water during immersion, resistant to many oils and chemical etc


Other Specification
Contact PIN: Brass with Gold plating.
Coupling nut/screw: Brass with nickel plating
Insulation plastic: PA66+GF
Degree of protection: IP67/IP68
Operating temperature: -25°C ~ +85°C

*ALL MATERIALS ARE RoHS COMPLIANT.

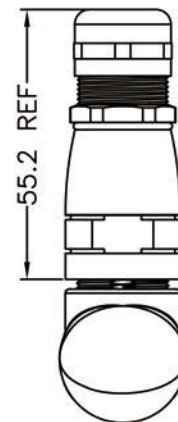

Electrical character

Contacts	Rated voltage		Rated current	Contact Resistance	Cable OD (mm)
	A/C	D/C			
	250V	250V	20A	3mΩ	6~8
	250V	250V	20A	3mΩ	6~8
	250V	250V	8+20	3mΩ	6~8
	150V	150V	8A	3mΩ	6~8
	150V	150V	8A	3mΩ	6~8
	150V	150V	8A	3mΩ	6~8
	150V	150V	(8+10)A	3mΩ	6~8

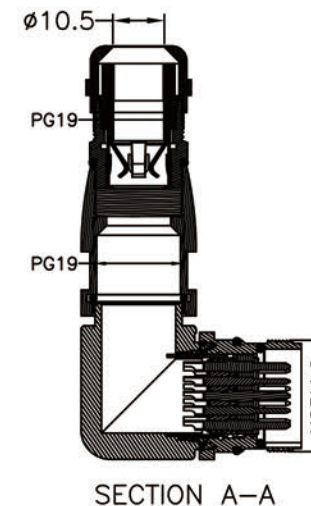

SIGNAL [®] Shen Zhen Signal Electronics co.,Ltd		TITLE M23 MALE HEAD METAL ASSEMBLY (ELBOW)	
		SGN NO	REV.
DRAWN BY	DATE	DWG NO	
CHECKED BY	DATE	CUSTOMER	S0
APPROVED BY	DATE	TOLERANCES ARE:	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		DECIMALES	ANGLES
		.x ±0.5	x' ±2.0'
		.xx ±0.20	.x' ±1.0'
		THIRD ANGLE PROJECTION	
		SIZE: A4	UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1