

说明:

1. 电气特性

额定电压: 150V AC/DC,

绝缘电阻: >100M ohms

额定电流: 8A

连接器的接触电阻≤5m ohms

2. 机械特性: 插拔/周期>100 次,

3. 环境特性

防护特级: IP67


操作温度: -40°C~115°C

4. 单PCS包装





客户料号, 产品名称、数量、日期

5. 所有材料都符合RoHS标准

接触端序号
为逆时针方向



空 PIN

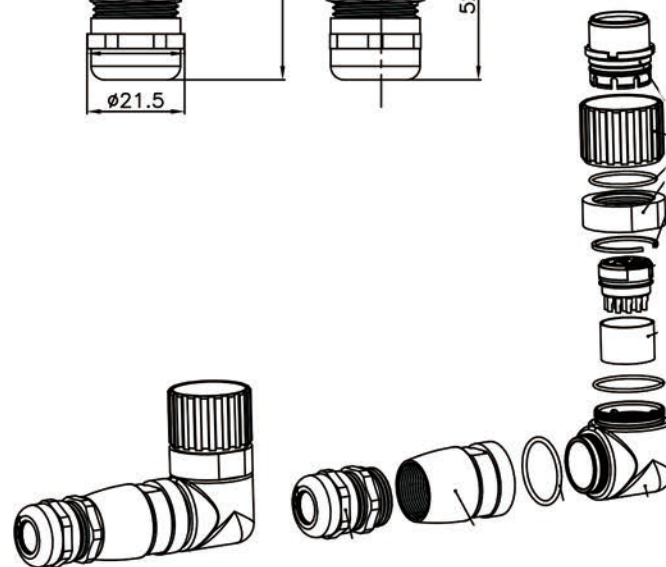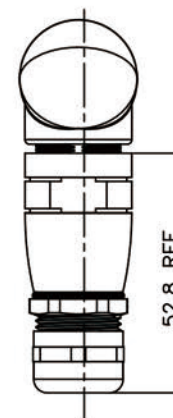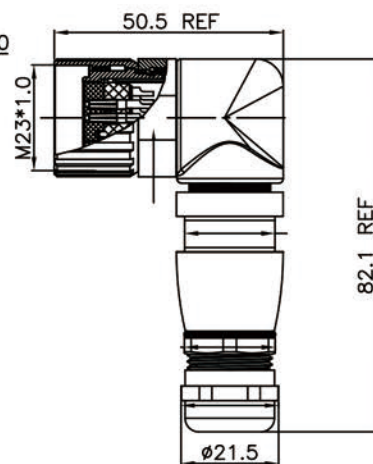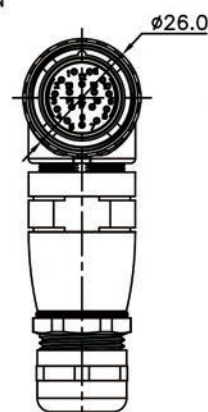

SIGNAL®

Shenzhen Signal Electronics co.,Ltd

DRAWING BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF SIGNAL COMPANY.
ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN
PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE M23 16PIN FEMALE HEAD METAL
ASSEMBLY (M23*1.0, ELBOW)

SGN NO	230016-02-002	REV.
DWG NO		
CUSTOMER		
		A0

TOLERANCES ARE:	THIRD ANGLE PROJECTION	
DECIMALES	ANGLES	SIZE: A4 UNITS: mm
.x ±0.5	.x' ±2.0°	SCALE: 1:1 SHEET: 1 OF 1
.xx ±0.20	.x' ±1.0°	