PROJECT NO:
XXX

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2020/08/20	ZCH

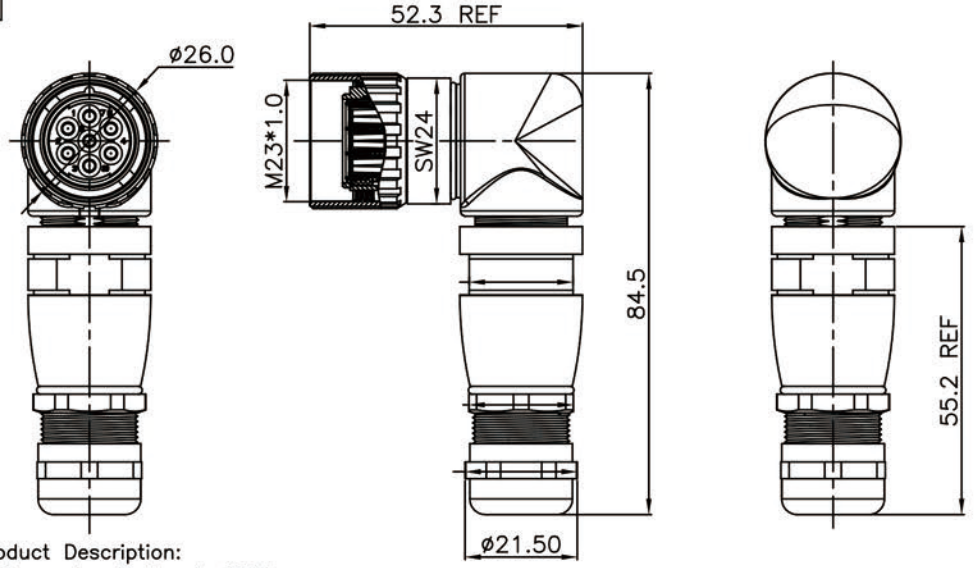



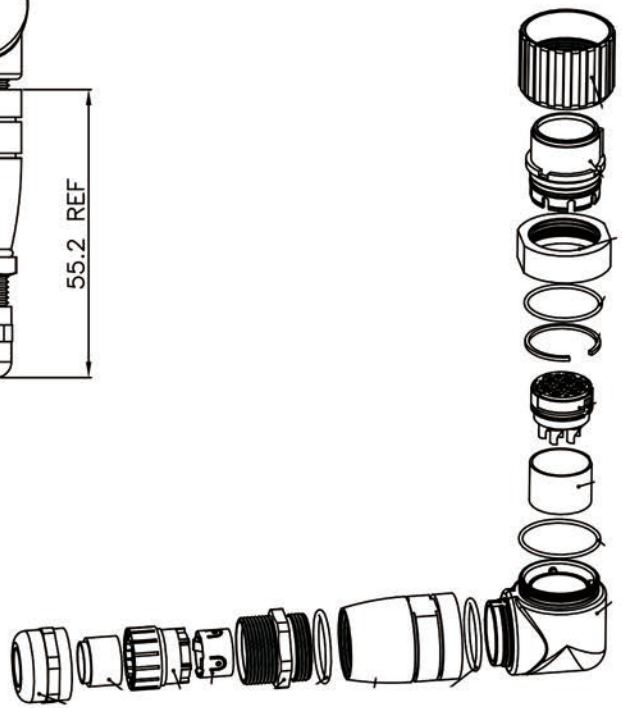

Detailed Product Description:
Waterproof Connector Rating Is IP67
They Can Not Be Used Permanently Under Water
Connector Electrical Character
Rating Voltage: See Table
Rating Current : See Table
Insulation Resistance: >100M ohms
Contact Resistance Of Connector ≤5m ohms
Mechanical Characteristics:
Mating / Cycle >500 Cycles
Operating Temperature: −40°C ~ +115°C
Design From DIN EN60664 AND DIN EN61984
Cable OD: ø3mm−ø9.5mm
Applicable Wire:2.5mm2^(14AWG);
*All Materials Are RoHS Compliant.

SIGNAL®
Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY ISPROHIBITED.

TITLE: M23 FEMALE HEAD METAL ASSEMBLY (M23*1.0, ELBOW)

SGN NO	230007−02−002	REV.
DWG NO		S0
CUSTOMER		

TOLERANCES ARE:		THIRD ANGLE PROJECTION
DECIMALES	ANGLES	
.x ±0.5	x.° ±2.0°	SIZE: A4
.xx ±0.20	.x° ±1.0°	SCALE:

UNITS: mm
SHEET: 1 OF 1

Web: http://www.sz-signal.com/
E-mail:saudi@sz-signal.com