






REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2022/05/07	ZCH

Contact end No is counter clock wise



DETAIL A
SCALE 3:1

DETAIL A

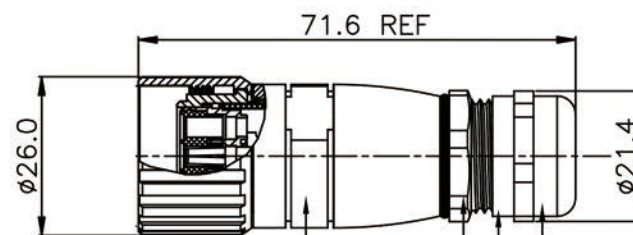

Detailed Product Description:

Waterproof Connector Rating Is IP67

They Can Not Be Used Permanently Under Water.

Connector Electrical Character

Rating Voltage: 250V AC/DC ,

Rating Current : 20A

Insulation Resistance: >100M ohms

Contact Resistance Of Connector ≤5m ohms

Mechanical Characteristics:


Mating / Cycle >100 Cycles



Operating Temperature: -40°C ~ +115°C

Design From DIN EN60664 AND DIN EN61984

Applicable Wire: 2.5mm²(14AWG),

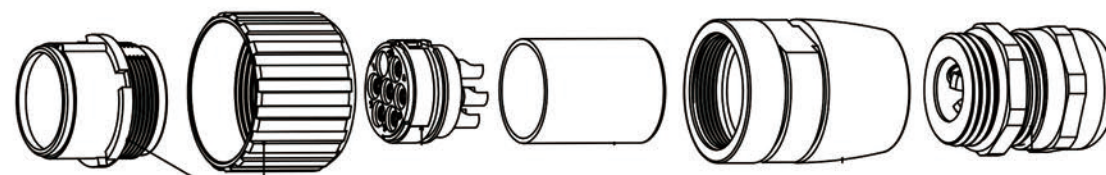All Marerials Are RoHS Compliant.



 SIGNAL® Shenzhen Signal Electronics co.,Ltd		TITLE M23 6 PIN FEMALE HEAD METAL ASSEMBLY (M23*1.0)	
		SGN NO 230006-02-001	REV.
DRAWING BY	DATE	DWG NO	S0
CHECKED BY	DATE	CUSTOMER	
CHECKED BY	DATE	TOLERANCES ARE:	THIRD ANGLE PROJECTION 
APPROVED BY	DATE	DECIMALES .x ±0.5 .xx ±0.20	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		ANGLES x." ±2.0' x." ±1.0'	SIZE: A4 UNITS: mm
		SCALE: 1:1	SHEET: 1 OF 1