


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2026/05/09	PWT

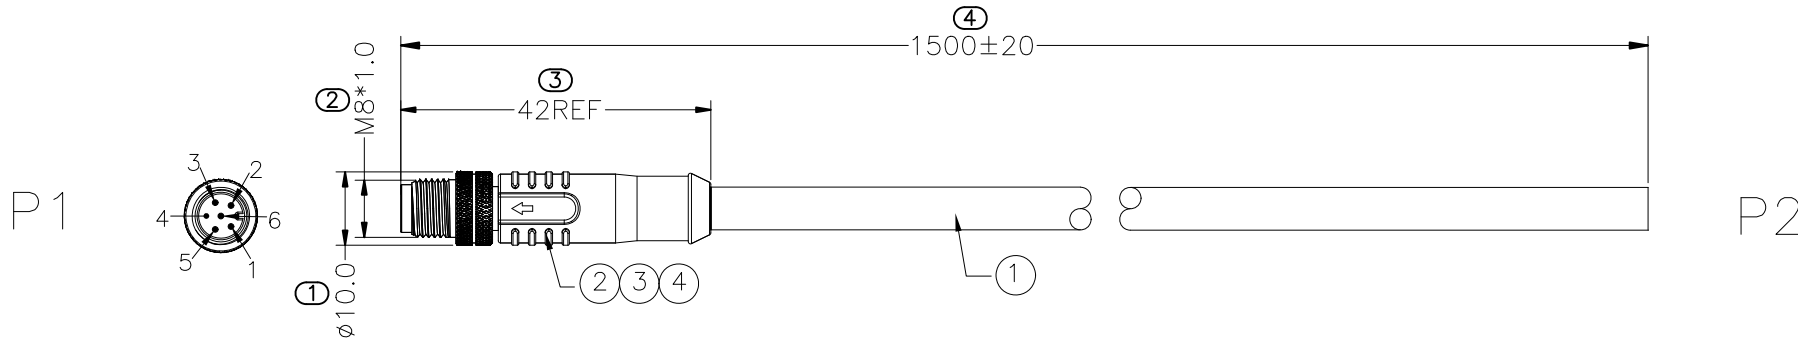

说明:

1.测试条件

导通阻抗: 5Ω MAX
 绝缘阻抗: 10MΩ MIN
 电 压: DC 300V/0.1S

2.所有材料都符合RoHS标准。

3.防护等级: IP67(P1)

4.100%开/短路测试或客户特殊要求测试

5.模具编号: 外模SGW01402/内模SGN01301

6.包装要求: 参照通用包装规范R&D-WI-082

注: 每箱重量不能超过15KG

接线表

P1	颜色	P2
1	棕色	OPEN
2	白色	
3	蓝色	
4	黑色	
5	灰色	
6	粉色	

④	PL00008	PVC 30P	5	G
③	PL00106	琥珀色透明低压注塑胶料, (产品型号: PA190)(成型温度220~240°)	2	G
②	080106-20-001	M8A型6芯公头焊线成型式(M8*1.0)	1	SET
①	CA00630	UL 2464 24AWG*6C, OD=5.0mm,外被黑色PVC(芯线颜色, 黑色、棕色、蓝色、灰色、白色、粉红色)	1	PCS

SIGNAL[®]
 ShenZhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE M8 A CODING 6P/M TO OPEN CABLE	
SGN NO 080106-05-002	REV.
DWG NO	S0
CUSTOMER	
TOLERANCES ARE: DECIMALES .x ±0.5 .xx ±0.20	ANGLES x.' ±2.0' .x' ±1.0'
THIRD ANGLE PROJECTION	SCALE: 1:1
SIZE: A4	UNITS: mm
SHEET: 1 OF 1	