


PROJECT NO:

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2025/12/24	HQC

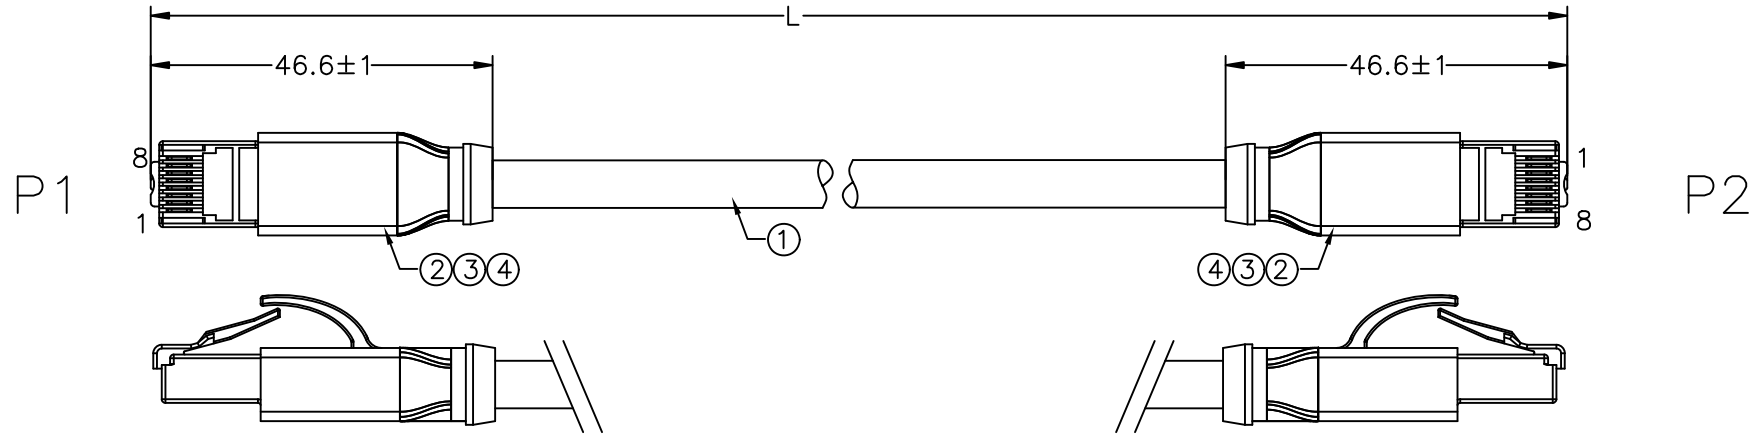

TESTING CONDITIONS:

1. VOLTAGE:300V DC/0.1S.
2. INSULATION RESISTANCE: 10 Mohms min.
3. CONDUCTIVE RESISTANCE: 5 Ohms max.
- 4.100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

WIRE LIST

P1	PAIR	COLOR	P2
1	X X	WHITE	1
2		ORANGE	2
3	X X	WHITE	3
6		GREEN	6
4	X X	BLUE	4
5		WHITE	5
7	X X	WHITE	7
8		BROWN	8
SHELL		BRAID	SHELL

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
④	PL00012	HD-PE	4	g
③	PL00011	BLACK PVC 45P	12	g
②	N/A	RJ45 8P8C CONNECTOR WITH SHIELD	2	PCS
①	N/A	CAT5E SFTP 26AWG*4P+AEB OD=6.2mm JACKET PVC BLUE	1	PCS

SIGNAL[®]
Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE: RJ45 TO RJ45-CAT5E

SGN NO 94000-55-148-Xm	REV.
DWG NO	S0
CUSTOMER	

TOLERANCES ARE:

DECIMALES	ANGLES	THIRD ANGLE PROJECTION
.x ±0.5	x.' ±2.0'	
.xx ±0.20	.x' ±1.0'	

SIZE: A4 UNITS: mm
SCALE: SHEET: 1 OF 1