


PROJECT NO:

REV	DESCRIPTION	DATE	APPROVED
A0	CREATED DRAWING	2026/05/20	ZXL

P1

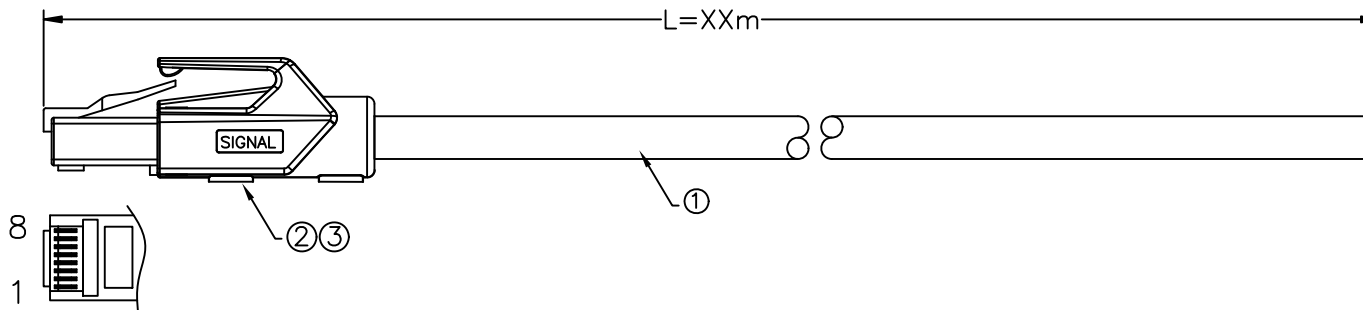

P2

TESTING CONDITIONS:

- VOLTAGE:300V DC/0.1S.
- INSULATION RESISTANCE: 10 Mohms min.
- CONDUCTIVE RESISTANCE: 5 Ohms max.
- 100% OPEN AND SHORT ELECTRICAL TEST.

*ALL MATERIALS ARE RoHS COMPLIANT.

WIRE LIST

P1	PAIR	COLOR	P2
1	X X	WHITE	OPEN
2		ORANGE	
3	X X	WHITE	
6		GREEN	
4	X X	BLUE	
5		WHITE	
7	X X	WHITE	
8		BROWN	
SHELL		BRAID	

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
③	WK00290-1	RJ45 JACKET BLACK PA66	1	PCS
②	CN00217	RJ45 8P8C CONNECTOR WITH SHIELD	2	PCS
①	N/A	CAT6A S/FTP 26AWG*4P+AEB OD=6.2m JACKET PU GREEN	1	PCS

SIGNAL [®] Shen Zhen Signal Electronics co.,Ltd		TITLE RJ45/M CABLE	
		DRAWN BY _____ DATE _____ CHECKED BY _____ DATE _____ APPROVED BY _____ DATE _____	SGN NO 940008-01-004 DWG NO _____ CUSTOMER _____
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE: DECIMALES .x ±0.5 ANGLES x.' ±2.0' .xx ±0.20 .x' ±1.0'	THIRD ANGLE PROJECTION SIZE: A4 UNITS: mm SCALE: 1:1 SHEET: 1 OF 1