


PROJECT NO:

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2026/05/21	ZXL

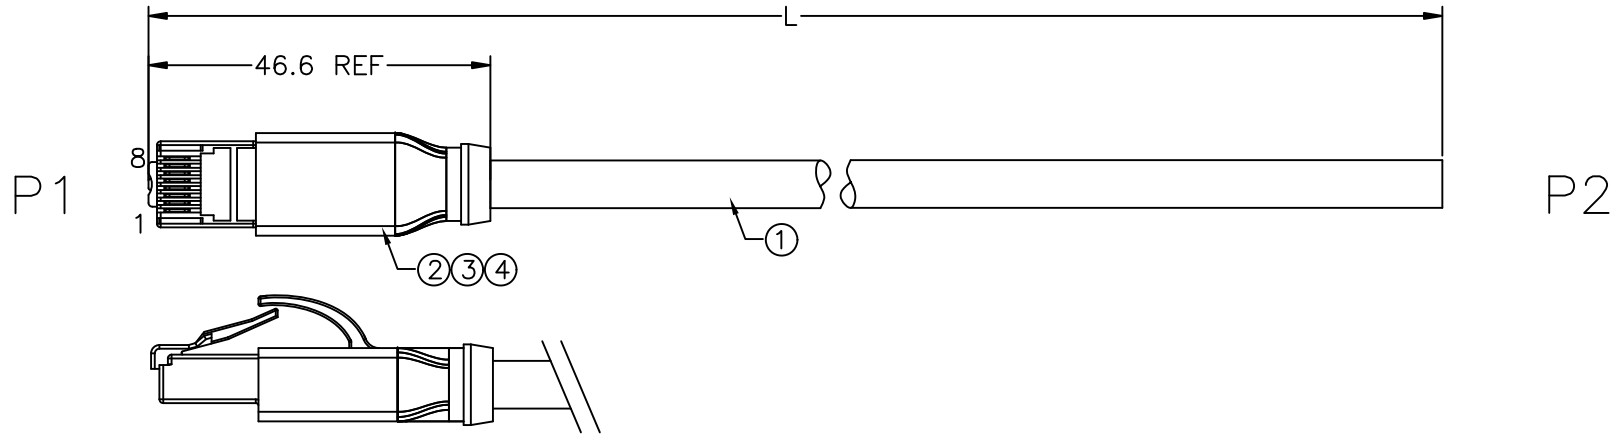

TESTING CONDITIONS:

1. VOLTAGE:300V DC/0.1S.
2. INSULATION RESISTANCE: 10 Mohms min.
3. CONDUCTIVE RESISTANCE: 5 Ohms max.
- 4.100% OPEN AND SHORT ELECTRICAL TEST.

\*ALL MATERIALS ARE RoHS COMPLIANT.

WIRE LIST

P1	PAIR	COLOR	P2
1	X X	WHITE	OPEN
2		ORANGE	
3	X X	WHITE	
6		GREEN	
4	X X	BLUE	
5		WHITE	
7	X X	WHITE	
8		BROWN	
SHELL		BRAID	

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
④	PL00012	HD-PE	2	g
③	PL00011	BLACK PVC 45P	6	g
②	N/A	RJ45 8P8C CONNECTOR WITH SHIELD	1	PCS
①	N/A	CAT5E SFTP 26AWG*4P+AEB OD=6.2mm JACKET PVC	1	PCS

**SIGNAL**<sup>®</sup>  
Shenzhen Signal Electronics Co., LTD

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE RJ45 8P/M TO OPEN CABLE	
SGN NO 940008-01-005	REV.
DWG NO	S0
CUSTOMER	
TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALES .x ±0.5	ANGLES x.' ±2.0'
.xx ±0.20	.x' ±1.0'
SIZE: A4	UNITS: mm
SCALE:	SHEET: 1 OF 1