


REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2025/12/24	HQC

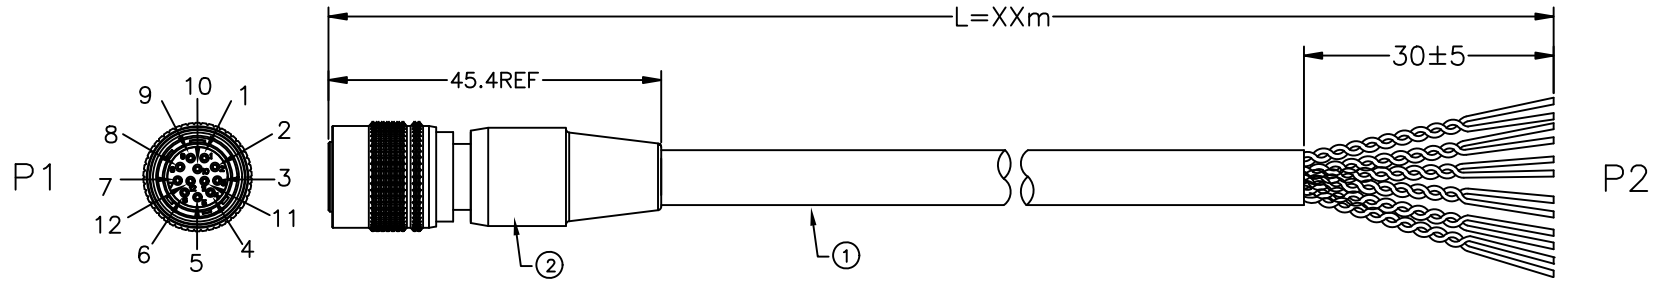

说明:

1.测试条件

导通阻抗: 5Ω MAX

绝缘阻抗: 10MΩ MIN

电 压: DC 300V/0.1S

2.所有材料都符合RoHS标准

3.100%开/短路测试

接线表

P1	PAIR	颜色	P2
1	XX	黑白	OPEN
2	XX	黑	
3	XX	红白	
4	XX	红	
5	XX	黄黑	
6	XX	黄	
7	XX	橙白	
8	XX	橙	
9	XX	棕白	
10	XX	棕	
11	XX	绿白	
12	XX	绿	

 Shenzhen Signal Electronics Co., LTD		TITLE	
		SHR10 12 CORE STRAIGHT HEAD SHEATHED CONNECTING WIRE - STANDARD WIRE	
DRAWN BY		SGN NO 950112-06-006-Xm	
CHECKED BY		REV.	
CHECKED BY		DWG NO	
APPROVED BY		CUSTOMER	
DATE		S0	
DATE		TOLERANCES ARE:	
DATE		DECIMALES	THIRD ANGLE PROJECTION
DATE		ANGLES	SIZE: A4
DATE		.x ±0.5	UNITS: mm
DATE		.x' ±2.0'	SCALE:
DATE		.xx ±0.20	SHEET: 1 OF 1
DATE		.x' ±1.0'	

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
②	950112-21-001	推拉自锁系列01型12芯母头焊线式连接器	1	SET
①	YDCA0636	UL20276 26AWG*6P+AL+B 外被黑色 80P PVC OD7.00±0.20mm 芯线颜色: 黑白&黑, 红白&红, 黄黑&黄, 橙白&橙, 棕白&棕, 绿白&绿	1	PCS