
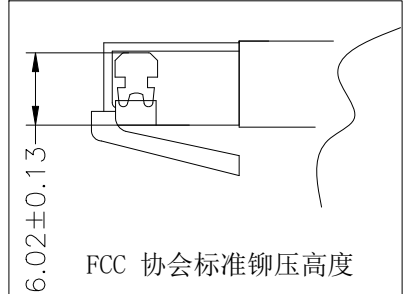
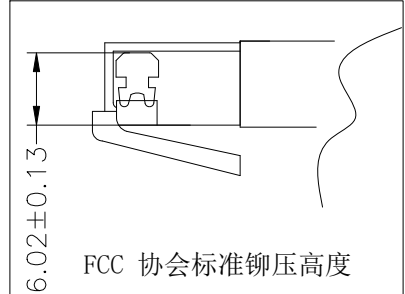


PROJECT NO:  
SGNN2604016-2355

REV	DESCRIPTION	DATE	APPROVED
S0	CREATED DRAWING	2026/04/18	PWT

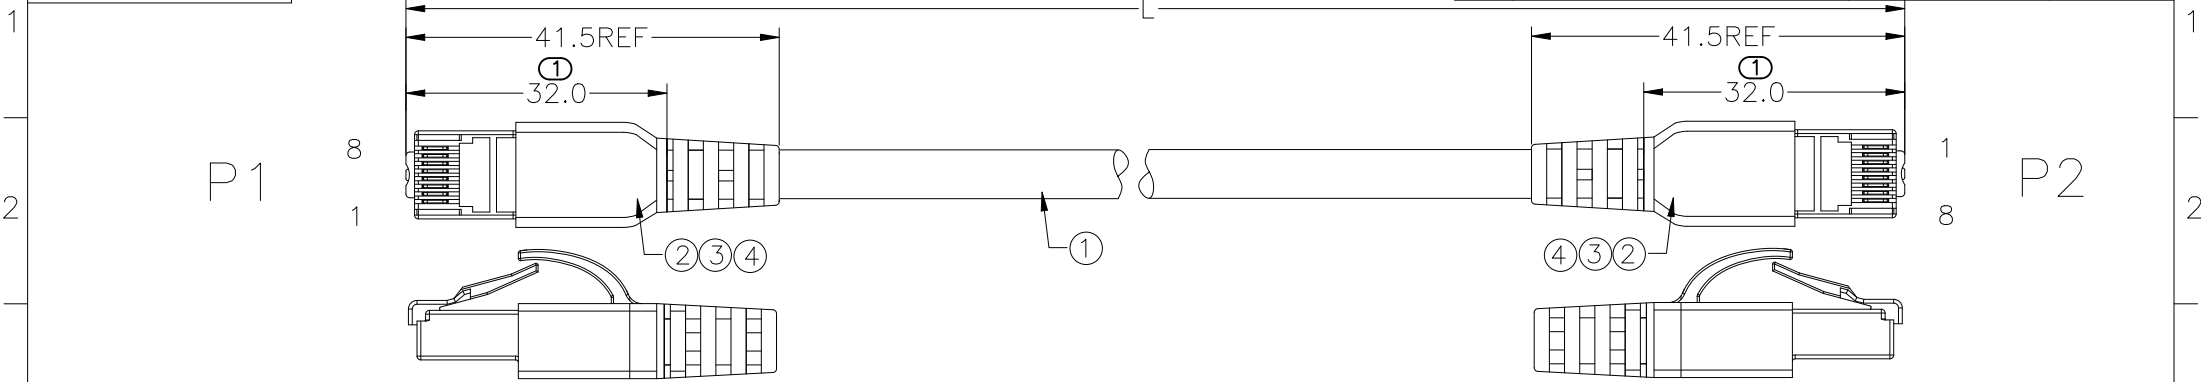

SGN NO	DWG NO	L(mm)
940000-55-175	SGNN2604016-7	500±15
940000-55-176	SGNN2604016-8	1000±20
940000-55-177	SGNN2604016-9	2000±20
940000-55-178	SGNN2604016-10	3000±30
940000-55-179	SGNN2604016-11	5000±50
940000-55-180	SGNN2604016-12	10000±100

接线表

P1	对绞	颜色	P2
1		橙/白	1
2		橙	2
3		绿/白	3
6		绿	6
5		蓝/白	5
4		蓝	4
7		棕/白	7
8		棕	8
SHELL		编织	SHELL

- 说明:
- 测试条件  
 导通阻抗: 5Ω MAX  
 绝缘阻抗: 10MΩ MIN  
 电 压: DC 300V/0.1S
  - 所有材料都符合RoHS标准。
  - 100%开/短路测试或客户特殊要求测试
  - 模具编号: SGWOXXXX//SGNOXXXX
  - 福禄克测试: 测试标准:TIA CAT6A CHANNEL

ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT
④	PL00012	透明低密度LD-PE料, 牌号: 2720	4	G
③	PL00037	黄色PVC 30P	12	G
②	CN00486	RJ45 8P8C 水晶头(C6R5Z50V2SIL-3B)(YDCN0009)	2	PCS
①	N/A	UL20554 SSTP CAT6A (26AWG*1P+AL)*4C+AB 外被黄色 (RAL1021) PUR OD=6.2mm芯线颜色: 蓝*白/蓝,橙*白/橙, 绿*白/绿, 棕*白/棕	1	PCS

**SIGNAL**<sup>®</sup>  
Shenzhen Signal Electronics co.,Ltd

DRAWN BY	DATE
CHECKED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.

TITLE RJ45 8P8C/M TO RJ45 8P8C/M CABLE	
SGN NO 940000-55-XXX	REV.
DWG NO SGNN2604016-XXX	S0
CUSTOMER	
TOLERANCES ARE:	THIRD ANGLE PROJECTION
DECIMALES .x ±0.5 .xx ±0.20	ANGLES x.' ±2.0' .x' ±1.0'
SIZE: A4	UNITS: mm
SCALE:	SHEET: 1 OF 1