


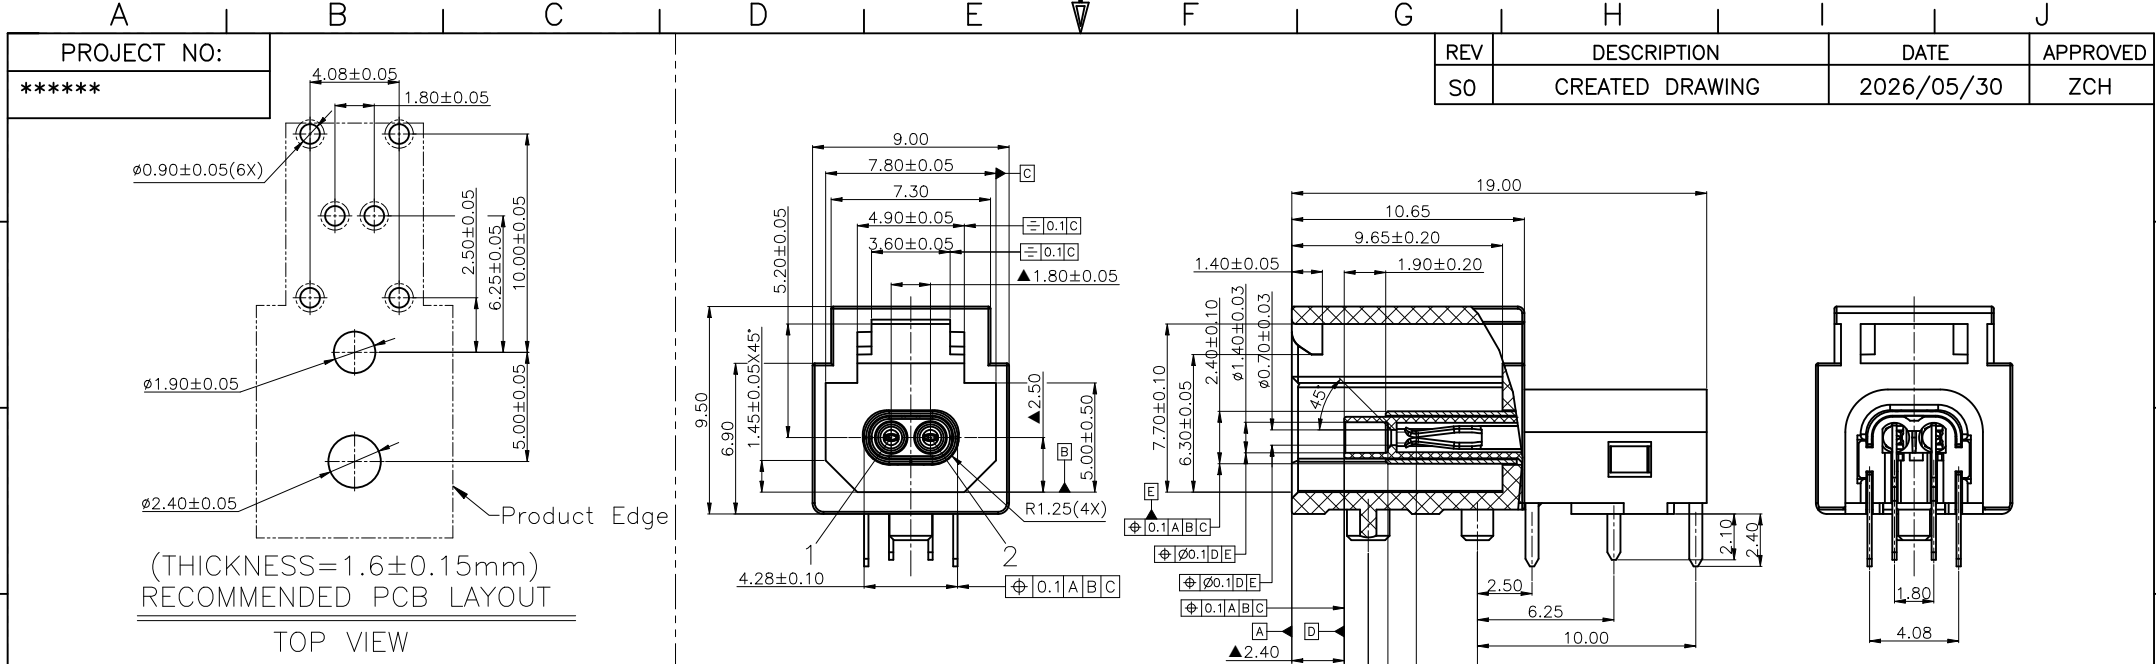

Detailed Product Description:

Waterproof Connector Rating Is IP20

Electrical Character

Rating Voltage: <50V AC/≤63V DC

Insulation Resistance: >100M ohms

Rating Current: 4A

Contact Resistance: ≤20m ohms

Shielding Resistance: ≤50m ohms

Dielectrical Withstanding Voltage:

1000V DC or AC peak(contact to contact.)

1500V DC or AC Peak: All Contacts Connected Together, to shield






Other Specification

Operating Temperature: -25°C ~ +85°C


Durability: 1000 Mating Cycles Min.

Insertion And Withdrawal: 30N Maximum.

*All Materials Are RoHS Compliant.

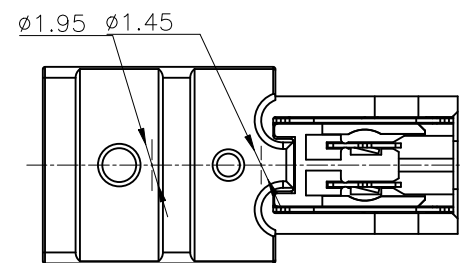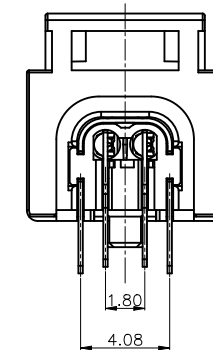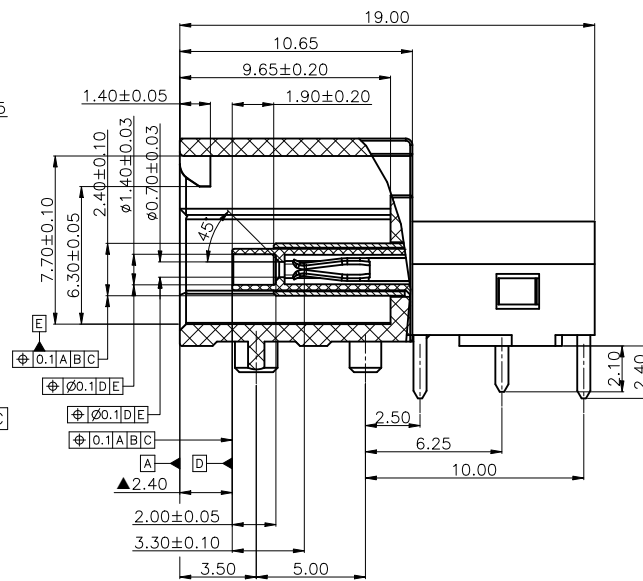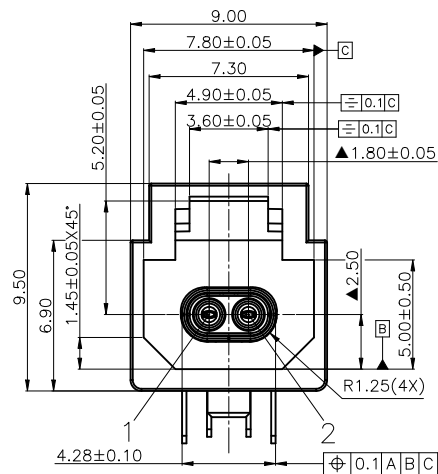

④	N/A	SPE 2PIN FEMALE SHIELD, K55 R620 TIN PLATED UNDER-NICKEL	1	PCS
③	N/A	SPE 2PIN FEMALE TERMINAL, K55 R620 GOLD PLATED ON COTACT AREA TIN PLATED ON TERMINAL AREA	2	PCS
②	N/A	SPE 2PIN FEMALE HOUSING, LCP E130i(CELANESE) BLACK	1	PCS
①	N/A	SPE 2PIN FEMALE INSULATOR,LCP E130i(CELANESE) BLACK	1	PCS
ITEM	PART NO.	SPECIFICATION	Q'TY	UNIT

		TITLE			
		SPE 63171-7 2PIN插座			
DRAWING BY		SGN NO		REV.	
		940002-04-009			
CHECKED BY		DWG NO		S0	
CHECKED BY		CUSTOMER			
APPROVED BY		DATE			
DATE		2527			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNAL COMPANY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNAL COMPANY IS PROHIBITED.		TOLERANCES ARE:		THIRD ANGLE PROJECTION	
		DECIMALES	ANGLES		
		.x ±0.5	x' ±2.0'	SIZE: A4	
		.xx ±0.20	x' ±1.0'	UNITS: mm	
		SCALE: 1:1		SHEET: 1 OF 1	